
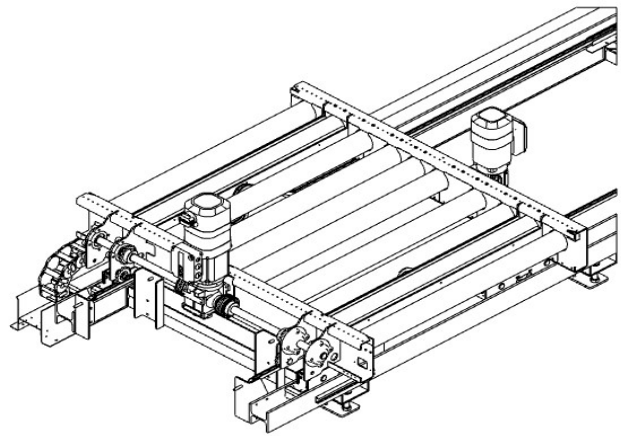
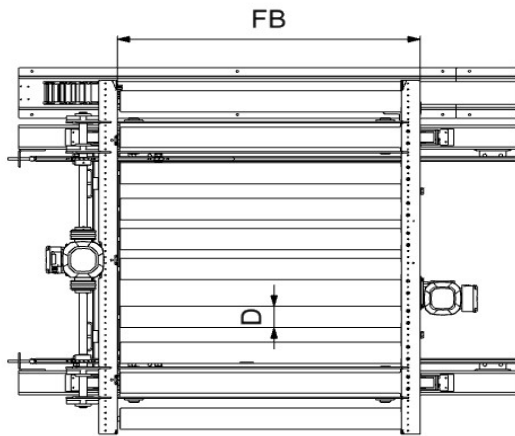
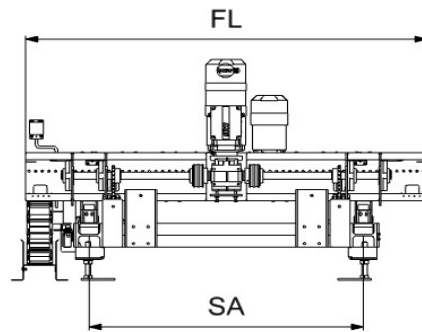


## Simple and cost-effective distribution of load carriers - our QVW

- Suitable for the horizontal transport of full and empty pallets (e.g. Euro, industrial and half pallets), pallet cages, workpiece carriers and skids.
- Horizontal movement via a chain with omega drive.
- Cable routing via energy chain.
- Drive purely electromechanical.
- Load capacity up to 1,500 kg.
- Speed up to 0,3 m/s.
- Roller conveyors and chain conveyors are suitable load handling devices.
- Simple installation by dowelling to the hall floor.
- Adjustable uprights are used to compensate for uneven floors.
- Use at normal room temperature and down to -30 °C in the freezer area.
- Surface sendzimir galvanised or powder-coated in your RAL colour.
- Special design on request.

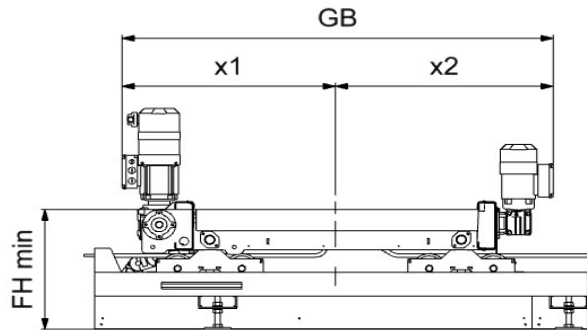

**List of abbreviations**

<b>FGB</b>	= width of conveyed material	<b>D</b>	= diameter of the idler roller	<b>FHmin</b>	= conveying height min.
<b>SA</b>	= rail spacing	<b>GB</b>	= total width	<b>FB</b>	= conveying width
<b>FGG</b>	= weight of the conveyed material	<b>x1</b>	= start dimension 1	<b>FL</b>	= conveying length
<b>v max</b>	= drive speed max.	<b>x2</b>	= start dimension 2		

**Standard dimensions in mm (Special versions are possible on request)**

Conveyed material	Dimensions								Carrying capacity in kg	Drive speed in m/s
	FGB	FB	FHmin	FL	x1	x2	GB	SA		
800	860	400	1500	700	720	1420	1025	89	1500	0,3
1000	1060	400	1500	800	820	1620	1025	89	1500	0,3
1200	1260	400	1500	900	920	1820	1025	89	1500	0,3